




»» WisAIR
WIS 40 - 75
WIS 20 - 75 V



Oil free
compressors

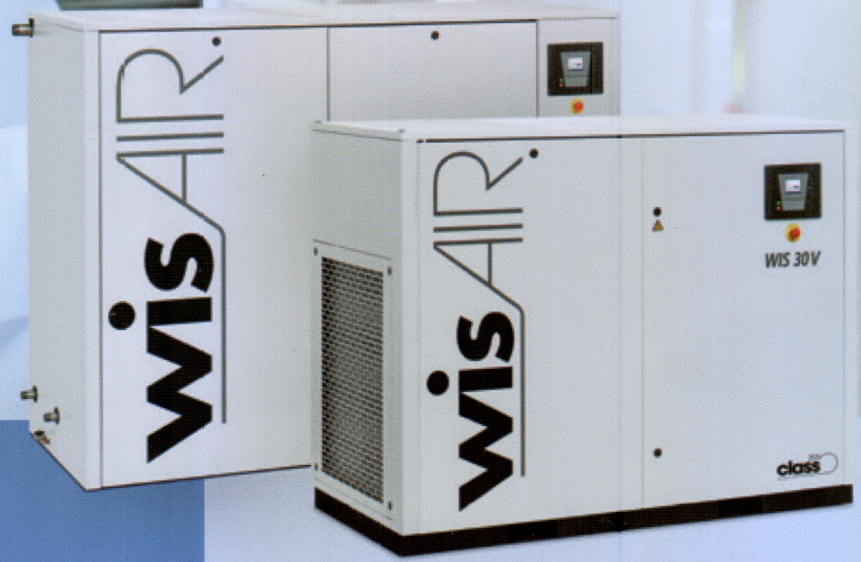

User benefits

WIS 20-75V oil-free compressors provide high-quality compressed air for a range of industrial applications. The continuous investment in product development has resulted in both economical and ecological compressors. The range is built focusing on three pillars to make them stand out.

Oil-free quality air

- Ultimate 100% oil free, clean air.
- The integrated air dryer enhances the air quality and protects your air network against corrosion.

Energy efficiency

- The most energy efficient compression due to low air discharge temperatures, optimized rotor profiles and no bearing losses.
- Integrated inverter technology assures a perfect match of air supply and air demand eliminating no load power losses.
- Direct driven no loss drive train.
- Graphic, full colour screen controller with intelligent energy saving features.

Ultimate reliability

- Friction free hydrodynamic bearings lubricated by clean, filtered lubricant.
- Durable materials to exclude any risk of corrosion.
- Reduced rotor stresses due to soft start up process.

Oil-free compressors

Industries such as pharmaceuticals, food and beverage, electronics and textiles cannot risk any chance of oil contamination in their processes. Therefore, it is essential that the compressed air is 100% oil-free. The standard is ISO 8573-1 (2010) certification, in which Class Zero represents the highest air purity. It is the only way to ensure oil-free air for your critical processes and with it peace of mind.

Outstanding reliability, low maintenance and operating costs make oil-free compressors a sound investment.

State-of-the-art installation

- ◆ Reduced installation costs:
 - ✓ No filter maintenance costs.
 - ✓ No pressure drop.
 - ✓ No condensate treatment.
 - ✓ No contamination.
- ◆ Reduced noise level even with multiple installations.
- ◆ Small footprint compared to conventional installation.
- ◆ Single central control point for multiple units with integrated sequencer or wall-mounted controller.





»»» When technology and ecology join forces

The WIS 20-75V range combines the user benefits and compressor features that matter most. All integrated into one concept!

»»» Premium performance




- Pressure rating up to 13 bar.
- Output from:
 - 306 to 504 m³/h.
 - 85 to 140 l/s.
 - 180 to 296 cfm.
- Radial cooling fan (air-cooled versions only) and sound-absorbing cabinet for premium cooling and noise performance.

»»» Premium quality

- ISO 8573-1 Class 0* certified quality air.
- Integrated dryer guaranteeing PDP < 3°C.
- Corrosion proof materials: aluminium bronze rotor housing, stainless steel rotor shaft, piping and separator vessel.
- Smooth start up with inverter driven technology.
- Clean piping.

»»» Premium efficiency

- Unique isotherm compression brings premium saving.
- Inverter driven technology provides up to 35% energy savings.
- Limited pressure band results in an overall reduced net pressure (1 bar extra pressure = 7% energy).
- 3.5" graphic full color controller with web visualization and intelligent saver cycles.
- Friction free air end bearings.
- Direct driven power train to reduce energy losses.
- Built-in dryer to reduce downstream pressure drop.

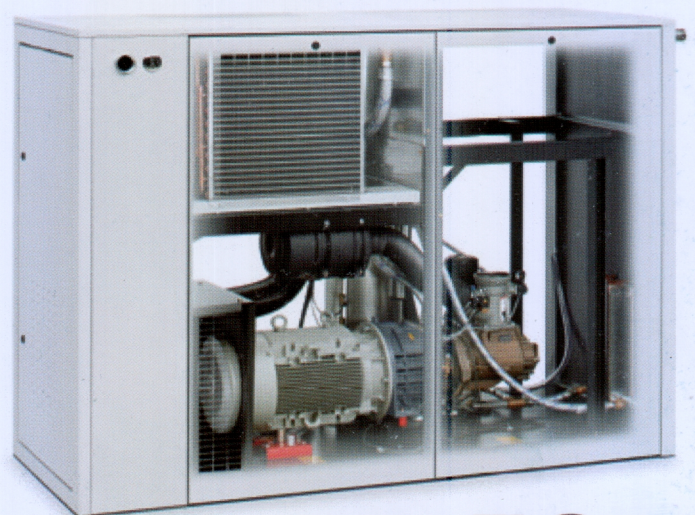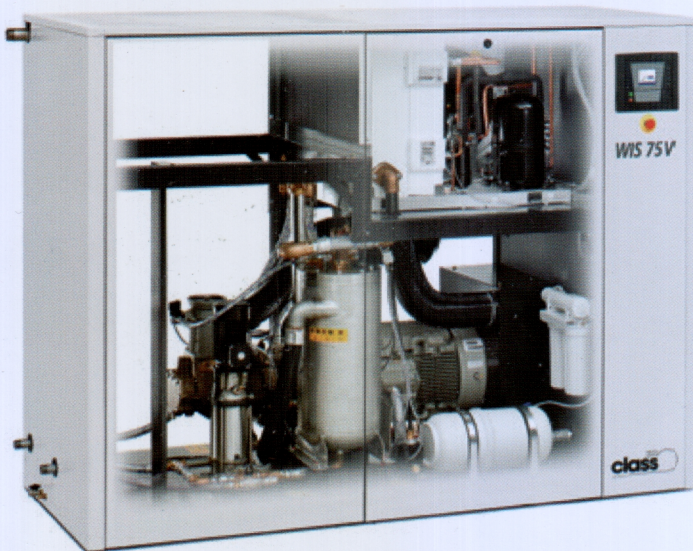

»»» Class 0*: eliminating any risk

Class 0 represents the best air quality possible. The WisAIR compressors are class zero certified, according to ISO 8573-1 class 0 Ed.3 2010 specifications, meeting the needs of the most demanding customers.


Contamination by even the smallest quantities of oil can cause costly production downtime and product spoilage, resulting in product recalls and loss of reputation.

CLASS* Concentration total oil (aerosol, liquid, vapour) mg/m³

0	As specified by the equipment user or supplier and more stringent than class 1
1	≤ 0,01
2	≤ 0,1
3	≤ 1
4	≤ 5

»»» One package - multiple benefits

Check out these innovative features of the WIS 20-75V range and see how they provide you with maximized efficiency, excellent air quality and low noise levels.

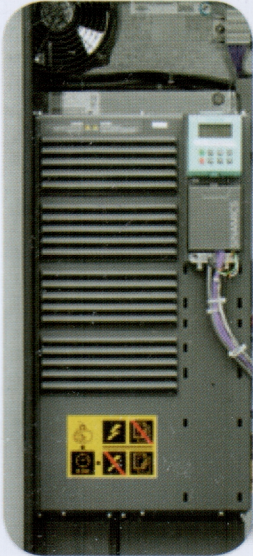

Integrated inverter

- Optimum zone control to optimize energy cost.
- Forced cooling air flow over electronics and smooth start-up to guarantee longer lifetime.
- More than 30% potential savings.

Direct drive set


- IP55 induction motor directly coupled to the air end.
- No long-term losses.
- Direct drive train for optimum efficiency.
- Flexible to meet pressure/flow requirement.

In-house designed elements

- Highly efficient profile.
- Corrosion-proof parts.
- Hydrodynamic bearings.

Integrated dryer

- Integrated into the package to reduce footprint, maintenance and installation cost.
- Designed to guarantee a constant pressure dew point of +3°C PDP.
- All readings/control function from one point.

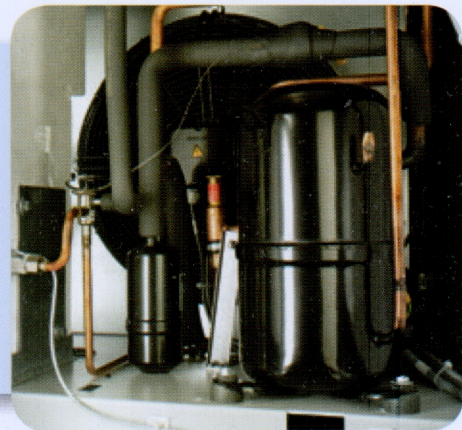

Sound insulated canopy



Allows installation in most working environments without requiring a separate compressor room.

Radial fan & cooling system

- The cooling turbine is installed in an easily accessible sound insulated cabinet.
- Oversized cooler pack to enhance cooling performance
- Maintaining a high cooling efficiency, the radial cooling turbine reduces the energy consumption.



»»» Savings from the oil-free air end

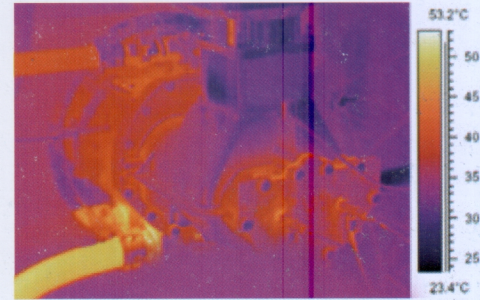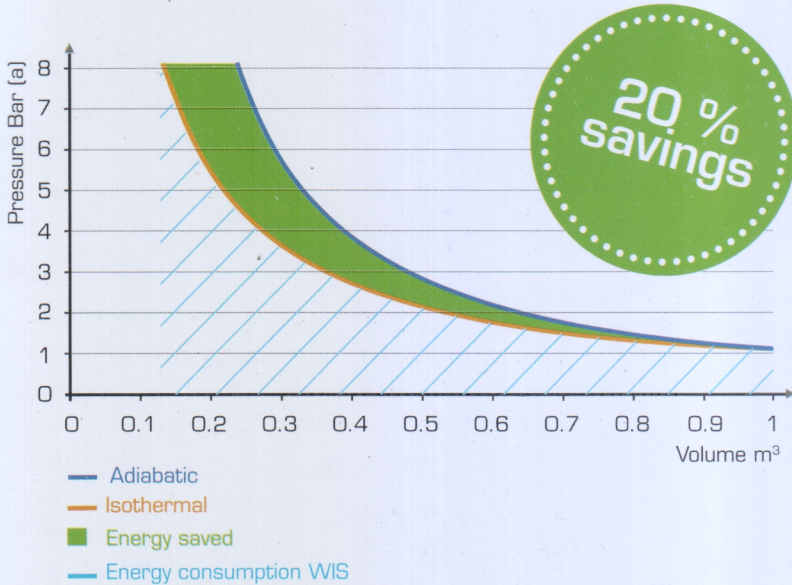

Limited temperature increase of only 25° C inside compressor element

Adiabatic compression: All compression heat is transferred to the compressed air (~ dry screw technology)

Isothermal compression: Constant temperature in compression chamber (~ WIS technology)

The WIS 20 - 75V range offers nearly isothermal compression. Superior air end cooling results in more compressed air for lower energy consumption.




»»» Savings from the controller

- Instant pressure logging and communication limits the pressure band and reduces the average net pressure.
- Integrated saver cycles to limit energy consumption and optimize air quality.
- Integrated sequencer for 4 up to 6 compressors limiting the energy consumption and equalizing running hours.
- Dual pressure band operation.



»»» Savings from inverter technology

Energy costs represent about 70% of the total operating cost of your compressor over a 5-year period. That is why reducing the operating cost of a compressed air solution is a major focus. The WisAIR oil-free screw compressor can cut the energy bill of your compressor by up to 30%.

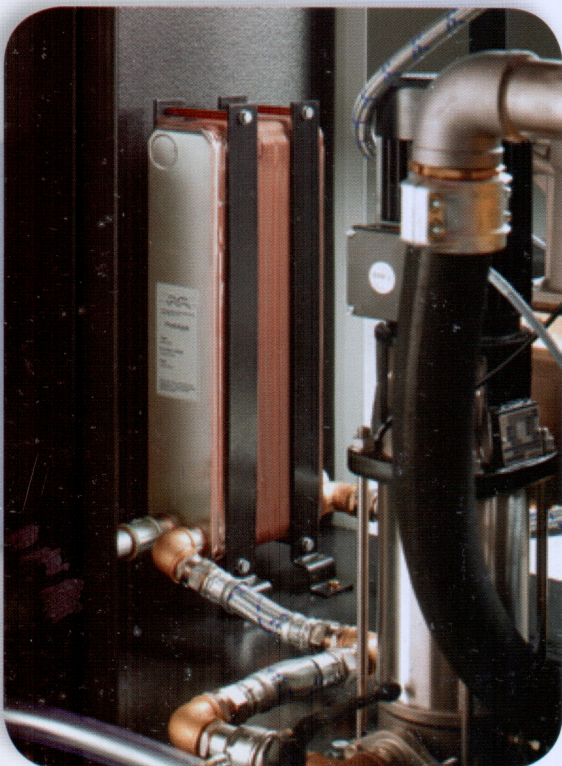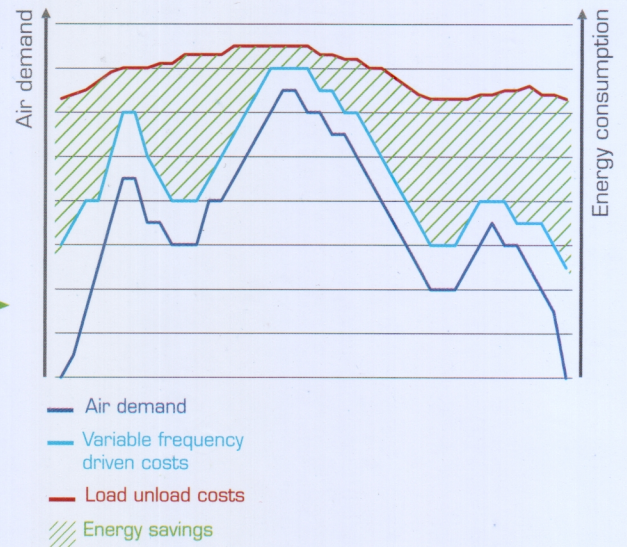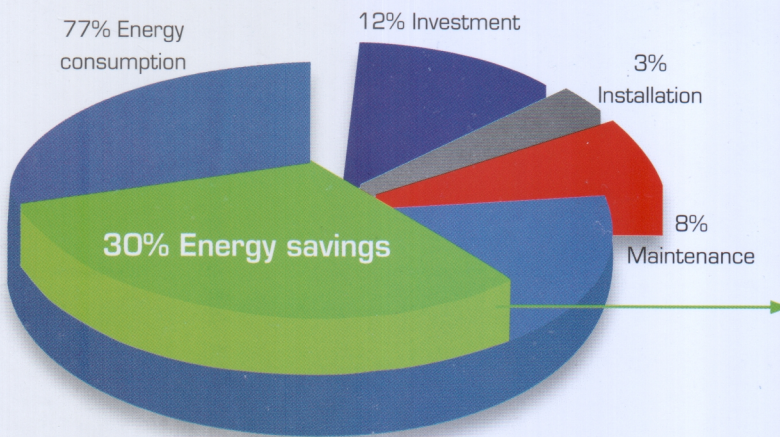

»»» Options to optimize your operations

A wide range of options enables you to get the most out of your WIS 20-75V compressor.

General options

- Booster pump
- Flanged inlet
- Anchor pads
- IT ancillaries

Protection

- Water shut-off valve
- Main power isolator switch

Air treatment

- Dryer bypass for unbreakable production

For further information on how our options can optimize your operations, please contact your local representative.



Technical specifications


FIXED SPEED VERSION	Max. working pressure	Reference working pressure	Free Air Delivery			Motor power		Noise level	Cooling air volume	Weight		Compressed air outlet diameter
Model	bar		m³/h	l/s	cfm	kW	hp	dB(A)		std (kg)	T (kg)	"
WIS 40	7,5	7	306	84.9	180.1	30	40	68	11520	1226	1320	1 1/2
	10	9.5	246	69.3	144.8	30	40	68				
	13	12.5	192	53.0	113.0	30	40	68				
WIS 50	7.5	7	366	1.2	215.4	37	50	69	11880	1298	1395	
	10	9.5	312	86.4	183.6	37	50	69				
	13	12.5	252	69.2	148.3	37	50	69				
WIS 60	7.5	7	438	121.4	257.8	45	60	71	15840	1321	1416	1 1/2
	10	9.5	354	98.1	208.4	45	60	71				
	13	12.5	294	82.2	173.0	45	60	71				
WIS 75	7.5	7	504	139.1	296.6	55	75	72	16200	1378	1497	
	10	9.5	426	118.1	250.7	55	75	72				
	13	12.5	354	98.4	208.4	55	75	72				

INVERTER VERSION	Max. working pressure	Reference working pressure	Free Air Delivery			Motor power		Noise level	Cooling air volume	Weight		Compressed air outlet diameter
Model	bar		m³/h	l/s	cfm	kW	hp	dB(A)		std (kg)	T (kg)	"
WIS 20V	13	7	78 - 168	22 - 47	47 - 100	15	20	67	1080	650	700	1
WIS 25V	13	7	78 - 192	22 - 54	47 - 114	18	25	69	1440	650	700	
WIS 30V	13	7	78 - 240	22 - 66	47 - 140	22	30	70	10080	740	800	
WIS 40V	13	7	78 - 300	22 - 83	47 - 176	30	40	72	10040	740	810	
WIS 50V	13	7	150 - 372	42 - 104	89 - 220	37	50	69	11880	1195	1306	1 1/2
WIS 75V	13	7	150 - 556	42 - 155	90 - 328	55	75	72	16200	1195	1314	

Dimensions

FIXED SPEED VERSION	Length std mm	Width mm	Height mm
WIS 40	2435	965	1840
WIS 50			
WIS 60			
WIS 75			

INVERTER VERSION	Length std mm	Width mm	Height mm
WIS 20V	1976	974	1500
WIS 25V			
WIS 30V			
WIS 40V			
WIS 50V	2435	965	1840
WIS 75V			

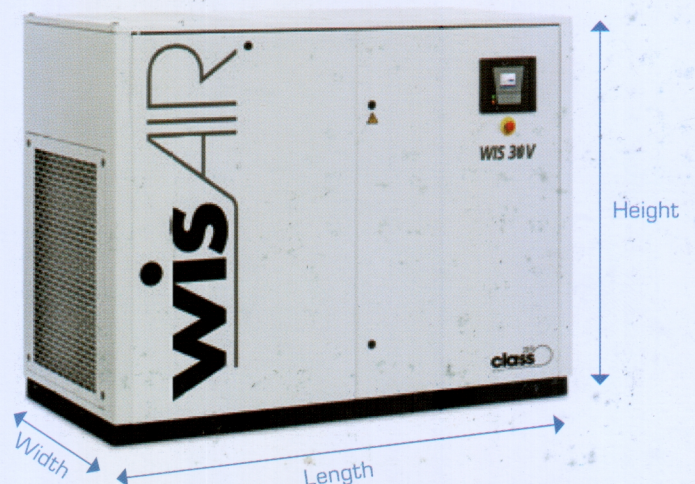

WisAIR
Oil-free compressors

WIS 40 - 75
WIS 20 - 75 V

 Oil free
compressors



- A high quality product offering you **technology you can trust**.
- Our products are **easy to use** and guarantee high **reliability**.
- Distributors are always nearby ensuring **availability** of both products and support.
- Choosing our high performance products entails a **partnership** that will boost your business.
- Safeguarding long-term productivity through optimal **serviceability** and use of original parts.



Care. Trust. Efficiency.

Care.

Care is what service is all about: professional service by knowledgeable people, using high-quality original parts.

Trust.

Trust is earned by delivering on our promises of reliable, uninterrupted performance and long equipment lifetime.

Efficiency.

Equipment efficiency is ensured by regular maintenance. Efficiency of the service organization is how Original Parts and Service make the difference.

© 2015, All rights reserved. All mentioned brands, product names, company names, trademarks and service marks are the properties of their respective owners. Our products are constantly being developed and improved. We thus reserve the right to modify product specifications without prior notice. Pictures are not contractually binding.

TPGP

PT. TRIPUTRA GLOBALINDO PRATAMA

Jl. Gunung Sahari Blok B6 No. 60-63
Jakarta 10610

Telp. : (021) 4280 1517 / 4287 9228 / 4287 1288

Fax. : (021) 422 9643

Homepage : www.tpgp-aircompressors.com

Branch Office

Tangerang

Ruko Sasatra Plaza No. A-23

Jl. Gatot Subroto Km. 5,4 Keroncong Jatiuwung - Tangerang

Telp.: (021) 556 9130 - 31 Fax. (021) 556 9132

Cikarang

Ruko Metro Boulevard 2 Unit A No.12-12A

Jl. Niaga Raya Jababeka II - Cikarang 17835

Telp.: (021) 2908 2956-57 Fax. (021) 2908 2958

Surabaya

Jl. Jemur Andayani XVIII / 34, Surabaya 60237

Telp.: (031) 841 6951 - 52, Fax.: (031) 841 1661

